

# Flush Latch with Integrated Hinge Function

1-162











## **Advantages**

- For surface mounted doors.
- Hinge concealed.
- Door bending 23 mm.
- RH and LH Version.
- 120° Opening angle.
- Vibration-proof according to DIN EN 61373.
- Flush latch through insert.
- When using 4 latches, the door can be lifted off completely.

### Material

- Door- and frame-part: zinc die, zinc plated
- Washer and countersunk screw: steel, zinc plated
- Lock washer: stainless steel

### Remarks

The fastening of the door-part can be done by welding studs max. M6x8mm.

- 1. installation instruction for fastening washer
- 2. blind plug
- 3. door-notch 92 x 2mm
- 4. door
- 5. frame
- 6. (S) door-thickness max. 8mm

### Flush latch


	Product number	Version	Insert	Installation type frame-part	Installation type door-part	Delivery Unit
a)	243-9218.00-00000	LH version	Square 8mm	Countersunk screw	screw-on	10 pcs.
b)	243-9219.00-00000	LH version	Square 8mm	pressed in stud M6	screw-on	10 pcs.



	Product number	Version	Insert	Installation type frame-part	Installation type door-part	Delivery Unit
a)	243-9220.00-00000	LH version	Double bit 3mm pin	Countersunk screw	screw-on	10 pcs.
b)	243-9221.00-00000	LH version	Double bit 3mm pin	pressed in stud M6	screw-on	10 pcs.
a)	243-9226.00-00000	LH version	Square 8mm with arrow	Countersunk screw	screw-on	10 pcs.
b)	243-9228.00-00000	LH version	Square 8mm with arrow	pressed in stud M6	screw-on	10 pcs.
a)	243-9222.00-00000	RH version	Square 8mm	Countersunk screw	screw-on	10 pcs.
b)	243-9223.00-00000	RH version	Square 8mm	pressed in stud M6	screw-on	10 pcs.
a)	243-9224.00-00000	RH version	Double bit 3mm pin	Countersunk screw	screw-on	10 pcs.
b)	243-9225.00-00000	RH version	Double bit 3mm pin	pressed in stud M6	screw-on	10 pcs.
a)	243-9227.00-00000	RH version	Square 8mm with arrow	Countersunk screw	screw-on	10 pcs.
b)	243-9229.00-00000	RH version	Square 8mm with arrow	pressed in stud M6	screw-on	10 pcs.





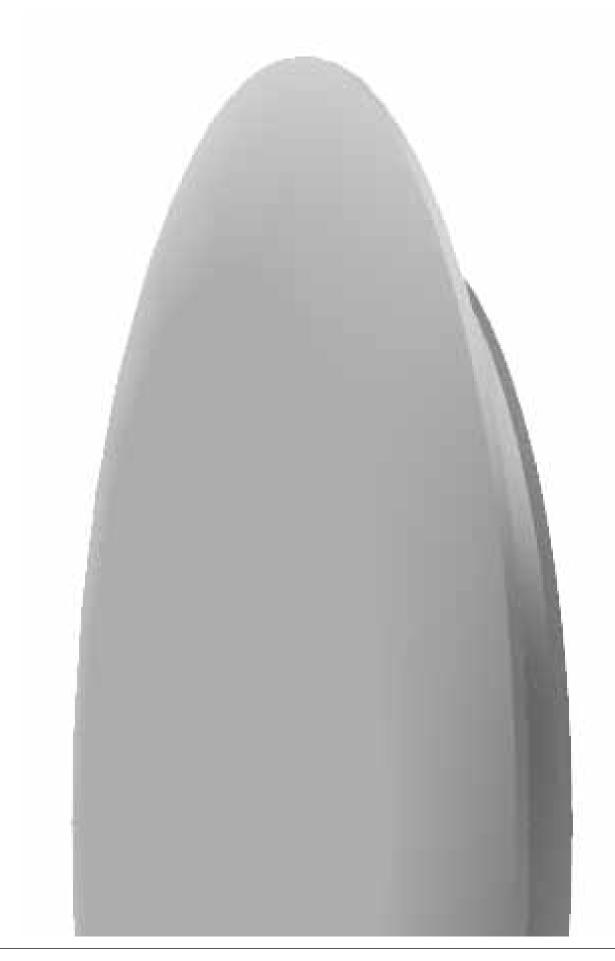

Page 4



