


DST Clamping Latch

1-070DST



Advantages

- Mini clamping latch with with DIRAK-SNAP-Technology and indicator.
- ~7.5mm compression stroke (1.).
- Tool-less installation.
- The knob can also be controlled by a Phillips screwdriver.
- The direction of opening/closing is clearly marked on the housing.
- By turning the knob, the cam is put into the latched position. Once latched, a further turning of the knob makes the cam start its compression feature.
- RH and LH version.

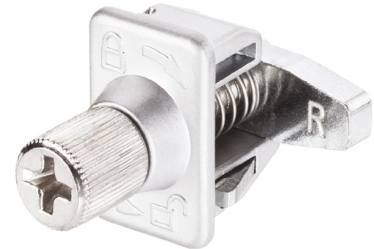

Material

- **Housing:** zinc die, matte chrome plated
- **Insert:** steel, matte chrome plated
- **Washer and straight cam:** steel, zinc plated
- **Spring:** stainless steel
- **Snap wedges:** sintered steel, zinc plated

Remarks

The latching and compression operation for the RH version is clockwise, for the LH version counterclockwise.

2. open
3. cam pivoted
4. cam compressed

Mini compression latch

Product number	Version	Clamping range (S)	Closing stroke	Installation type	Delivery Unit
448-9001.00-00810	RH version	0.8 mm - 1 mm	clockwise	tool-less	1 pc.
448-9001.00-01113	RH version	1.1 mm - 1.3 mm	clockwise	tool-less	1 pc.
448-9001.00-01416	RH version	1.4 mm - 1.6 mm	clockwise	tool-less	1 pc.

Product number	Version	Clamping range (S)	Closing stroke	Installation type	Delivery Unit
448-9002.00-00810	LH version	0.8 mm - 1 mm	counter clockwise	tool-less	1 pc.
448-9002.00-01113	LH version	1.1 mm - 1.3 mm	counter clockwise	tool-less	1 pc.
448-9002.00-01416	LH version	1.4 mm - 1.6 mm	counter clockwise	tool-less	1 pc.

