

DST Bridge Handle

6-1001DST



Advantages

- Bridge handle with DIRAK-SNAP-Technology, two sizes.
- Tool-less installation.
- The appealing design guarantees a firm and reliable grab.
- The closed surface makes it resistant to dirt and easy to clean.
- Lowest inside radius 5mm.
- For vertical or horizontal applications.
- Vibration-proof according to DIN EN 61373.

Material

- **Bridge handle and cap:** PA, black
- **Snap wedges:** sintered steel

Remarks


Handle for variable lengths in the same design see product system 6-1600DST.

Polyamide handle

	Product number	Clamping range (S)	L	L1	L2	H	H1	B	Installation type	Delivery Unit
a)	413-9003.00-00015	0.8 mm - 1.5 mm	122 mm	144 mm	100 mm	40 mm - 40 mm	29 mm	26 mm	tool-less	10 pcs.
a)	413-9003.00-00020	1.3 mm - 2 mm	122 mm	144 mm	100 mm	40 mm - 40 mm	29 mm	26 mm	tool-less	10 pcs.
a)	413-9003.00-00027	2 mm - 2.7 mm	122 mm	144 mm	100 mm	40 mm - 40 mm	29 mm	26 mm	tool-less	10 pcs.
a)	413-9004.00-00015	0.8 mm - 1.5 mm	150 mm	172 mm	128 mm	50 mm - 50 mm	39 mm	28 mm	tool-less	10 pcs.
a)	413-9004.00-00020	1.3 mm - 2 mm	150 mm	172 mm	128 mm	50 mm - 50 mm	39 mm	28 mm	tool-less	10 pcs.
a)	413-9004.00-00027	2 mm - 2.7 mm	150 mm	172 mm	128 mm	50 mm - 50 mm	39 mm	28 mm	tool-less	10 pcs.

Accessories Polyamide Handle

	Product number	Type	Installation type	Delivery Unit
b)	413-0901.54-00000	Cap	tool-less	10 pcs.

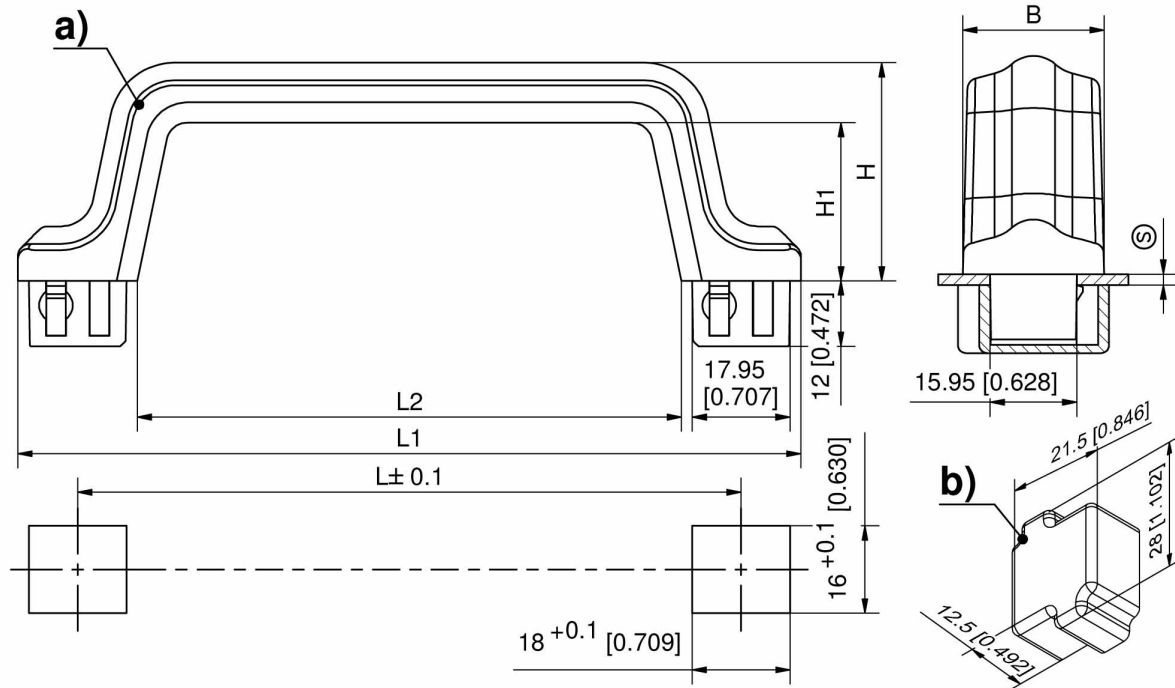



Additional information

Dimensions of PA Handles

All dimensions are to be understood as nominal dimensions in the assembled condition. Due to post-shrinkage, relaxation and moisture absorption depending on potential influences (e.g. temperature, humidity, etc.), the dimensional accuracy may deviate in the delivery / storage condition without affecting the assembly of the article.