

Swinghandle mechatronic RS/FS PrC

MLI1101



Advantages

- Electronic unlocking by applying voltage.
- Opening readiness is visualized by LED.
- Handle status can be evaluated.
- IP30 according to DIN EN 60529.
- Mechanical emergency opening by key cylinder.
- RH / LH application.



Material

Handle, dish, cap, cylinder cover and rod latch: PA, black

Remarks

(S) Door-thickness max. 2mm

1. LED

Further technical details please see data sheet

Swinghandle MLI1101 with key cylinder

	Product number	Application	Voltage	Installation type	Delivery Unit
a)	610-9007.00-00000	Rod latch	24V	screw-on	1 pc.
a)	610-9007.12-00001	Rod latch	12V	screw-on	1 pc.
a)	610-9007.48-00001	Rod latch	48V	screw-on	1 pc.
b)	610-9009.00-00000	3-point cam	24V	screw-on	1 pc.
b)	610-9009.12-00001	3-point cam	12V	screw-on	1 pc.
b)	610-9009.48-00001	3-point cam	48V	screw-on	1 pc.
c)	610-9010.00-00000	Offset	24V	screw-on	1 pc.
c)	610-9010.12-00001	Offset	12V	screw-on	1 pc.
c)	610-9010.48-00001	Offset	48V	screw-on	1 pc.

Swinghandle MLI1101 with insert square 8

	Product number	Application	Voltage	Installation type	Delivery Unit
a1)	610-8025.12-0VKT8	Rod latch	12V	screw-on	1 pc.
a1)	610-8025.24-0VKT8	Rod latch	24V	screw-on	1 pc.
b1)	610-8026.12-0VKT8	3-point cam	12V	screw-on	1 pc.
b1)	610-8026.24-0VKT8	3-point cam	24V	screw-on	1 pc.

Rod latch MLI1101

	Product number	Rod fastening	Installation type	Delivery Unit
e)	208-8379.00-00000	C-clip	screw-on	1 pc.

Functionality/Activation

Mechanical opening option via cylinder barrel or electronic opening/release by applying voltage. A LED indicates that the MLI1101 is ready to open. Handle status (open/closed) can be evaluated.

Open/Close status


Handle status can be evaluated via integrated potential-free reed sensor

- Contact form: Normally open contact (when the handle is closed, the contact is closed)
- Switching voltage: max. 30V DC
- Transport current, switching current: max. 0.5A
- Sensor resistance: 360 mohm

Technical data

- Power supply (DC): 12V/24V/48V
- Current: 450mA/175mA/120mA
- Temperature range: 0°C to 60°C
- Features: IP30 according to DIN EN 60529; mechanical emergency opening via cylinder barrel with various closing options possible
- Solenoid: Duty cycle = 100%
- Wall/sheet thickness: up to 2mm
- ROHS, REACH

Wire Designation

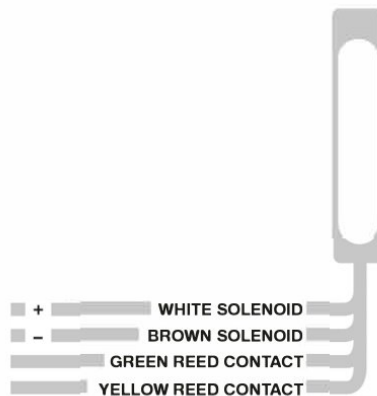

Connection line

- Length: 4m
- Ø 4.4mm with 4 single wires cross-section 0.14mm²



**Attention: Risk of crushing and abrasion when pressing shut the swinghandle.
Be careful not to injure yourself when closing the handle.**

Liability clause for sales products

The above information and our technical application advice, whether verbal, in writing or by means of tests, are given to the best of our knowledge. However, this information shall be regarded as non-binding only, also with regard to any third-party property rights.

This information does not exempt you from conducting your own review of our current advisory suggestions. This applies in particular to the technical information on our products in terms of their suitability for use and application.

The application, use and processing of our products and the products manufactured by you on the basis of our technical application advice are beyond our control and are therefore exclusively your responsibility.

The sale of our products is subject to our current general terms and conditions of sale and delivery.

