


# DST Dual Hook FS

3-910DST

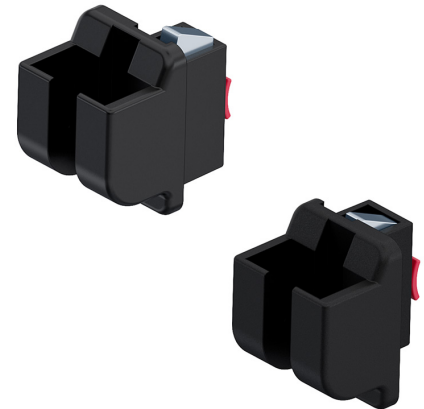

## Advantages

- Dual hook with DIRAK-SNAP-Technology for system dimension (18) and bending (25).
- Tool-less installation.
- Closed version.
- Installation by a simple push into the cutout.
- IP65 according to DIN EN 60529 (optional).

## Material

- **Dual hook:** zinc die, black
- **Snap wedges:** sintered metal, plated
- **O-Ring:** NBR/ Perbunan

## Remarks

For changing the application from the right to the left side or vice versa, a RH or LH version is needed.

1. flat rod
2. dual rollers
3. stroke 24mm

## Dual hook

	Product number	Version	Clamping range (S)	Installation type	Delivery Unit
a)	408-9104.00-00015	RH version	1.2 mm - 1.7 mm	tool-less	1 pc.
a)	408-9104.00-00020	RH version	1.7 mm - 2.2 mm	tool-less	1 pc.
a)	408-9104.00-00025	RH version	2.2 mm - 2.7 mm	tool-less	1 pc.
a)	408-9104.00-00030	RH version	2.7 mm - 3.2 mm	tool-less	1 pc.
b)	408-9105.00-00015	LH version	1.2 mm - 1.7 mm	tool-less	1 pc.
b)	408-9105.00-00020	LH version	1.7 mm - 2.2 mm	tool-less	1 pc.
b)	408-9105.00-00025	LH version	2.2 mm - 2.7 mm	tool-less	1 pc.



---

	<b>Product number</b>	<b>Version</b>	<b>Clamping range (S)</b>	<b>Installation type</b>	<b>Delivery Unit</b>
b)	408-9105.00-00030	LH version	2.7 mm - 3.2 mm	tool-less	1 pc.

---

