Hinge Pr05 180°

4-185



Advantages

- For surface mounted doors for adjacent cabinets.
- Hinge partly visible.
- Door bending 25mm.
- RH / LH application.
- 180° Opening angle.

Material

- **Frame- and door-part:** zinc die, glossy chrome plated or black
- **Washer:** brass, nickel plated
- **Pin:** steel, zinc plated
- **Fastening washer:** steel, zinc plated

Remarks

(S) Door-thickness min 1.5 - max. 2mm
for door thickness (S) 1.5mm x= 12mm
for door thickness (S) 2 mm x= 15mm

1. washer
2. fastening washer

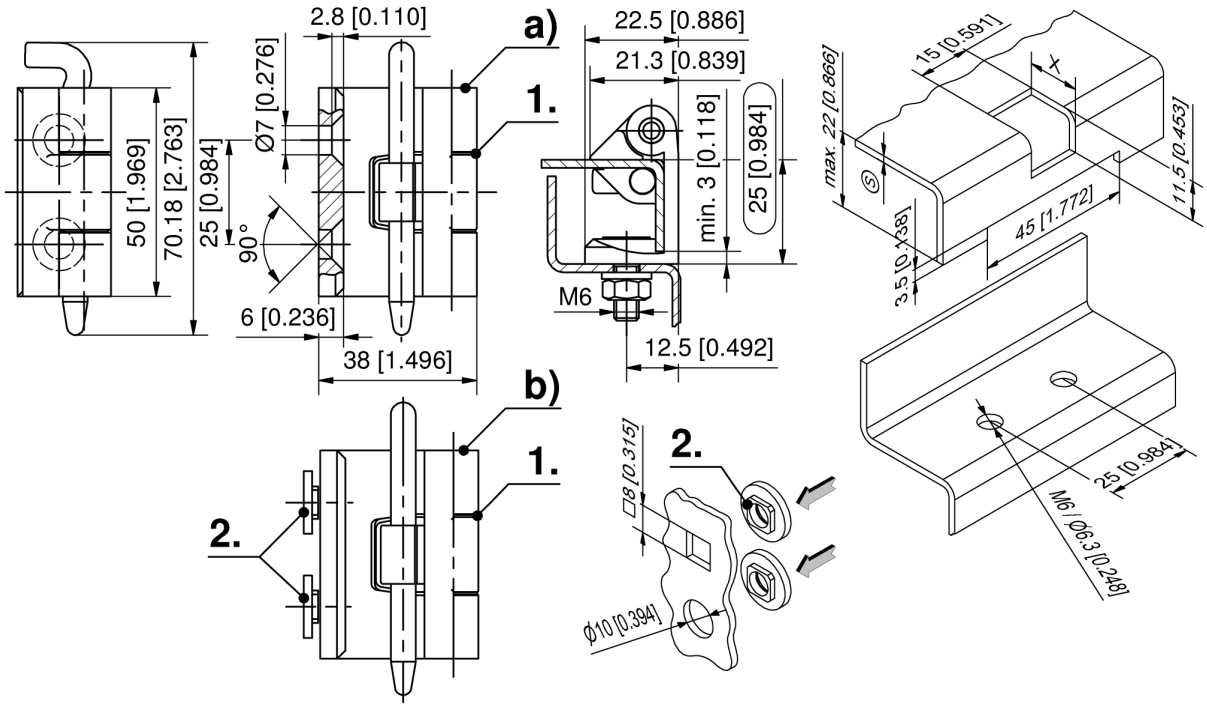
Hinge, zinc die, black

	Product number	cutout in frame	Frame-part	Pin version	Installation type	Delivery Unit
a)	212-9038.00-00000	Ø6	with countersunk holes for M6	loose	screw-on	10 pcs.
b)	212-9037.00-00000	□8 or Ø10	with countersunk holes for M6 + fastening washer	loose	screw-on	10 pcs.

Hinge, zinc die, glossy chrome plated

	Product number	cutout in frame	Frame-part	Pin version	Installation type	Delivery Unit
a)	212-9088.00-00000	Ø6	with countersunk holes for M6	loose	screw-on	10 pcs.

	Product number	cutout in frame	Frame-part	Pin version	Installation type	Delivery Unit
b)	212-9050.00-00000	□8 or Ø10	with countersunk holes for M6 + fastening washer	loose	screw-on	10 pcs.


2.8 [0.110]
a)
1.
22.5 [0.886]
21.3 [0.839]
Ø7 [0.276]
50 [1.969]
70.18 [2.763]
25 [0.984]
90°
min. 3 [0.118]
25 [0.984]
M6
6 [0.236]
38 [1.496]
12.5 [0.492]
b)
1.
2.
2.
□8 [0.315]
ϕ10 [0.394]
15 [0.591]
max. 22 [0.866]
11.5 [0.453]
45 [1.772]
3.5 [0.138]
25 [0.984]
M6 / Ø6.3 [0.248]